


EDISP (NWL3)  
(English) Digital Signal Processing  
DFT Windowing, FFT

October 24, 2011

# DFT resolution

- ▶ N-point DFT  $\rightarrow$  frequency sampled at  $\theta_k = \frac{2\pi k}{N}$ , so the resolution is  $f_s/N$
- ▶ If we want more, we use  $N_1 > N$  filling with zeros (zero-padding)
- ▶ but IDFT will give  $N_1$ -periodic signal
- ▶ and the spectrum will have *sidelobes*

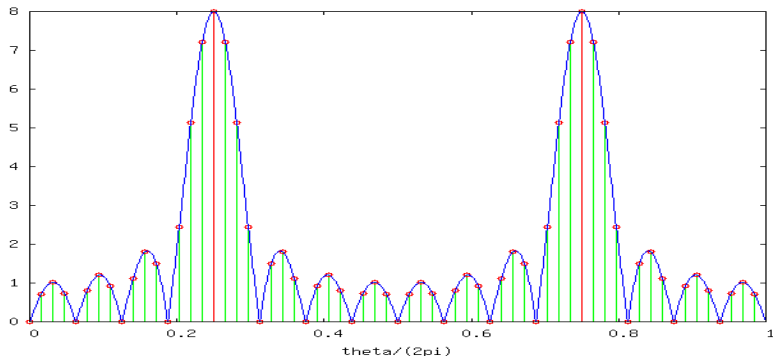

# Limited observation time



For DFT we used to cut a fragment of the signal

$$x_0[n] = x[n]g[n], \text{ where } g[n] = \begin{cases} 1 & \text{for } n = 0, 1, \dots, N-1 \\ 0 & \text{for other } n \end{cases}$$

$g[n]$  is a window function. Here - a *boxcar window*

Window effect:



- ▶ selection of a signal fragment
- ▶  $x[n] \cdot g[n]$  in time  $\longrightarrow X(\theta) * G(\theta)$  in spectral domain  $\longrightarrow$  *sidelobes* or *spectral leakage*

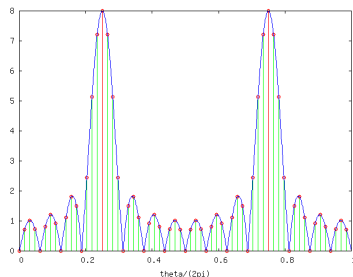


# Windowing a pure cosine

Example to be done on slide, temporarily on blackboard (-:-).

# Leakage example

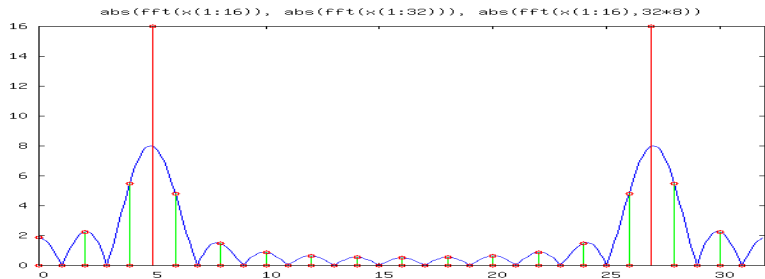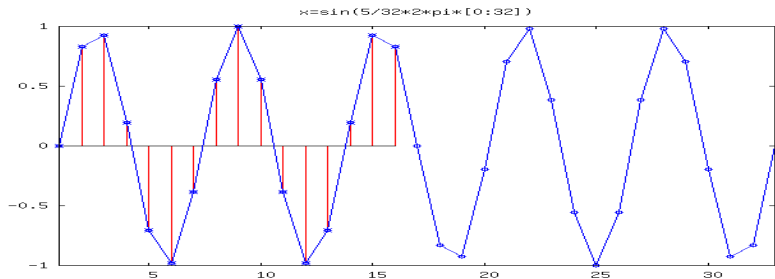

# Window (apodization) functions

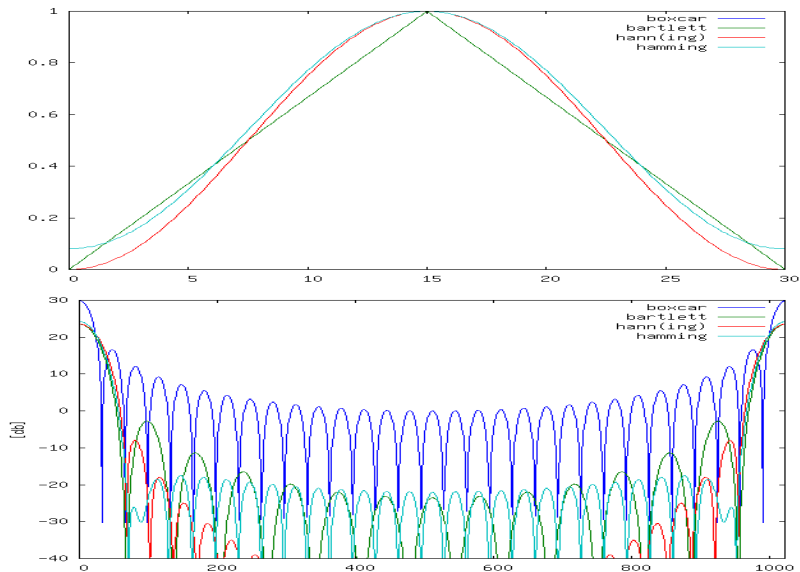

## Raised cosine window family

- ▶ Hann window: Julius von Hann, 1839 – 1921, Austrian meteorologist; *hanning* is a verb form (*to hann*)  $w(n) = 0.5 \left(1 - \cos\left(\frac{2\pi n}{N-1}\right)\right)$
- ▶ Hamming window: Richard Hamming, 1915 – 1998, American mathematician;  $w(n) = 0.53836 - 0.46164 \cos\left(\frac{2\pi n}{N-1}\right)$
- ▶ Blackman window  $w(n) = 0.42 - 0.5 \cos\left(\frac{2\pi n}{N-1}\right) + 0.08 \cos\left(\frac{4\pi n}{N-1}\right)$

# Kaiser window

(D. Slepian, H.O. Pollak, H.J. Landau, around 1961, *Prolate spheroidal wave functions* ...)

- ▶ time limited sequence with energy concentrated in finite frequency interval
- ▶ a family of windows with many degrees of freedom
- ▶ Kaiser (1974) – an approximation to optimal window: standard method to compute the optimal window was numerically ill-conditioned.



$$w_n = \begin{cases} \frac{I_0\left(\alpha\sqrt{1-\left(\frac{2n}{N}-1\right)^2}\right)}{I_0(\alpha)} & \text{if } 0 \leq n \leq N \\ 0 & \text{otherwise} \end{cases}$$

$I_0$  – zeroth order modified Bessel function of the first kind,

- ▶  $\alpha$  (real number) determines the shape of the window:
  - ▶  $\alpha = 0$  gives Boxcar,
  - ▶  $\alpha = 4$  gives -30 dB first sidelobe, -50 asymptotic,
  - ▶  $\alpha = 8$  gives -60 dB first sidelobe, -90 asymptotic,



# Kaiser window



# Fast DFT algorithms $\longrightarrow$ FFT

- ▶ Direct computation with pre-computed  $W_N = e^{-j2\pi/N}$  (*twiddle factors*):

$$X(e^{j\theta_k}) = \sum_{n=0}^{N-1} x(n) W_N^{kn}$$

$\longrightarrow$  complexity:  $N^2$

- ▶ Goertzel algorithm:  $X(k) = y_k(N)$ , where

$$y_k(n) = \sum_{r=0}^{N-1} x(r) W_N^{-k(n-r)}$$

$\longrightarrow$  filtering:  $y_k(n) = x(n) + y_k(n-1) \cdot W_n^{-k}$


- ▶ Decimation in time **FFT** (first stage):

$$\begin{aligned} X(k) &= \sum_{n \text{ even}} x(n) W_N^{nk} + \sum_{n \text{ odd}} x(n) W_N^{nk} = \\ &= \sum_{r=0}^{N/2-1} x(2r) (W_{N/2})^{rk} + W_N^k \sum_{r=0}^{N/2-1} x(2r+1) (W_{N/2})^{rk} \end{aligned}$$

## radix-2 FFT

$$X(k) = \sum_{n \text{ even}} x(n) W_N^{nk} + \sum_{n \text{ odd}} x(n) W_N^{nk} =$$
$$\sum_{r=0}^{N/2-1} x(2r) (W_{N/2})^{rk} + W_N^k \sum_{r=0}^{N/2-1} x(2r+1) (W_{N/2})^{rk}$$

- ▶ If  $N = 2^L$  ... We can continue with this trick - decimating each half into sub-halves, each sub-half into sub-sub ...  $L$  times
- ▶ for  $k > N/2$ ,  $W_N^k = -W_N^{k-N/2}$
- ▶ DFT with size 1 is rather trivial




Effect: We have  $L$  layers of  $N/2$  butterflies. Each butterfly is one multiplication, one addition, one subtraction. In the result, we have  $O(N \log_2 N)$  operations


### FFT inventors

James W. Cooley and John W. Tukey, "An algorithm for the machine calculation of complex Fourier series," Math. Comput. 19, pp. 297-301 (1965).


## 8-point radix-2 FFT

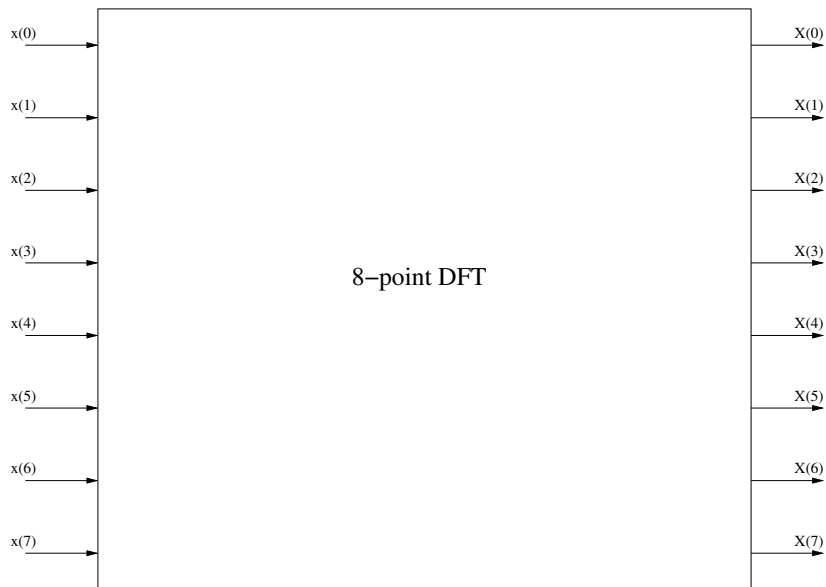


# 8-point radix-2 FFT

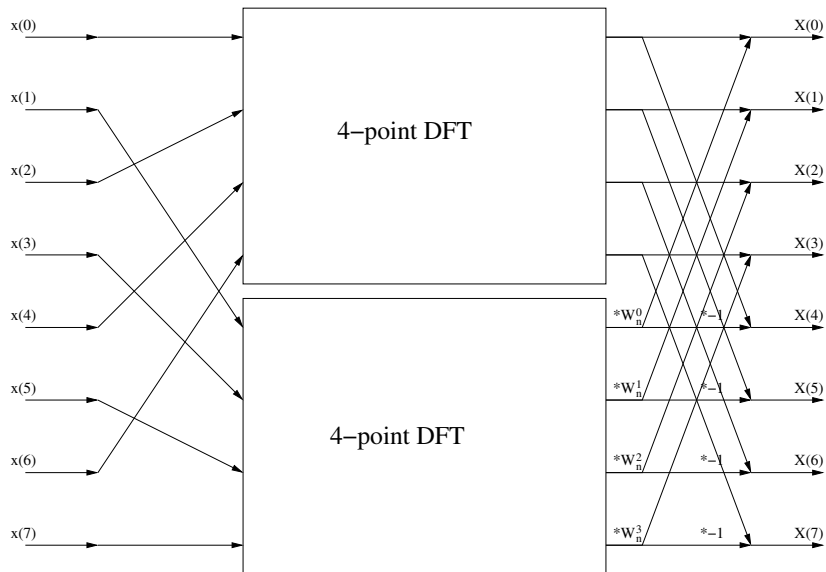

# 8-point radix-2 FFT

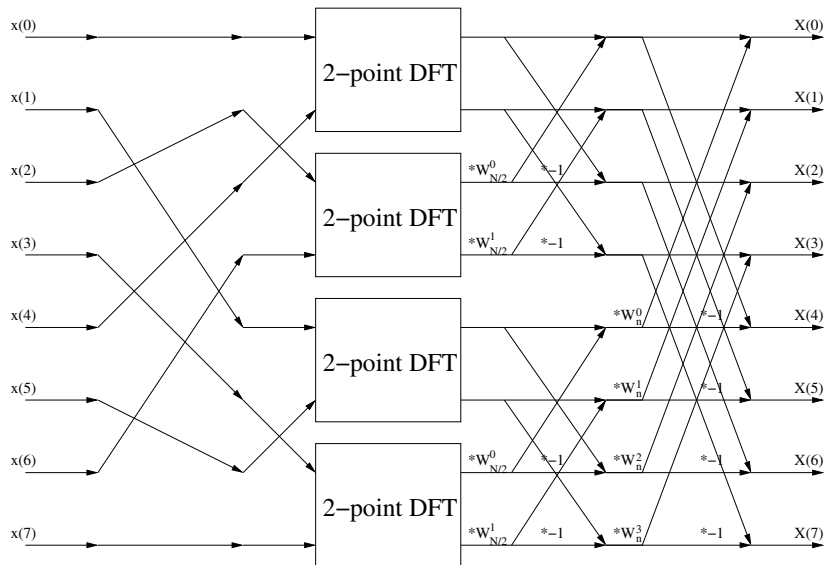


# 8-point radix-2 FFT

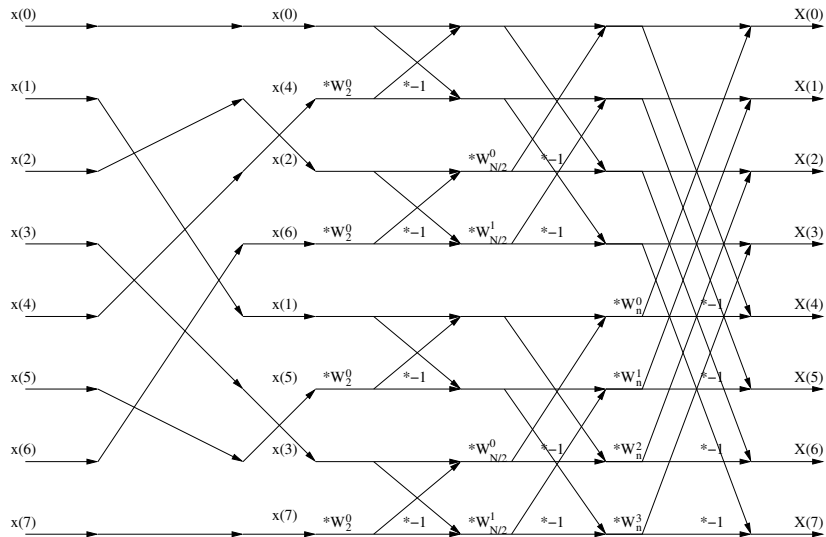

# Indexing for FFT

How to describe the sequence of numbers: 0, 4, 2, 6, 1, 5, 3, 7?

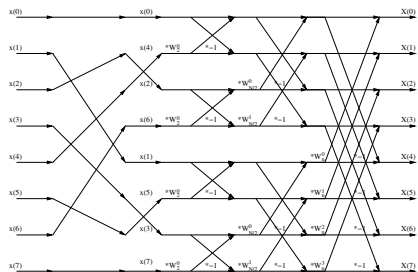

- ▶  $0 = 000_2$  is at position  $000_2$
- ▶  $4 = 100_2$  is at position  $001_2$
- ▶  $2 = 010_2$  is at position  $010_2$
- ▶  $6 = 110_2$  is at position  $011_2$
- ▶  $1 = 001_2$  is at position  $110_2$
- ▶  $5 = 101_2$  is at position  $101_2$
- ▶  $3 = 011_2$  is at position  $110_2$
- ▶  $7 = 111_2$  is at position  $111_2$

→ bit-reversal does the job!

Processors designed for FFT do have the bit-reversal mode of indexing. (And they do a butterfly in one or two cycles)



# Decimation in frequency FFT

- ▶ We split the definition formula for  $k$  even ( $= 2r$ ) or odd ( $= 2r + 1$ )
  - ▶ We note that  $W_N^{2nr} = W_{N/2}^{nr}$  or  $W_N^{n(2r+1)} = W_N^n \cdot W_{N/2}^{nr}$
  - ▶ Further, for  $n > N/2$   $W_N^n = -W_N^{n-N/2}$
  - ▶ and so on - please sketch the DIF FFT diagram by yourselves
- here, we need to re-index the frequencies...

# Specials

- ▶ Non-radix2 FFT - slower than radix2, but still faster than direct
- ▶ Chirp-z transform - one use of it is to calculate FT for  $\theta$ 's not equal to  $2\pi/N$
- ▶ Non-uniform FFT ...
- ▶ FFTW - the Fastest FFT in the West - a free library, used by many free and commercial products (Frigo & Johnson from MIT)

# Summary

- ▶ DTFT - spectrum of a discrete-time signal (defined for a limited-energy signal or a limited mean power signal in a different manner) *periodic, continuous or discrete function of  $\theta$*
- ▶ DFT - samples of DTFT of a limited duration signal (or a segment....) *periodic, discrete  $X(k)$*
- ▶ FFT - a trick (method[s]) to compute DFT efficiently